


IR VANDAL-PROOF FISH EYE CAMERA

FEI-360IP5

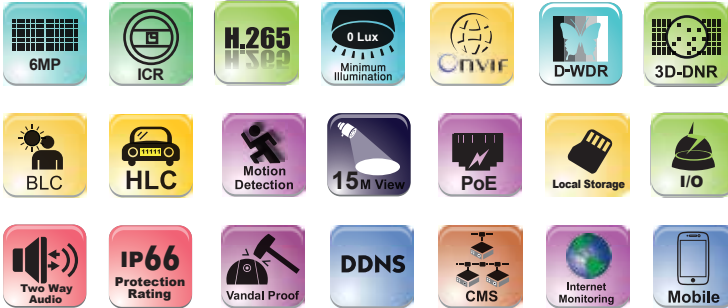

- | | | | |
|-------------------------------------|--------------------------------------|---------------------|--------------------|
| 1/2.9" CMOS Sensor | ONVIF | 15m IR Illumination | I/O |
| 6 Mega-Pixel | Digital WDR / BLC / HLC | PoE Support | CVBS |
| True Day & Night (IR Cut Removable) | 3D Noise Reduction | Local Storage | IP 66 Protection |
| H.265 (HEVC) Compression | Motion Detection and Privacy Masking | 2 Way Audio | IK 10 Vandal Proof |
| 0 Lux (IR On) Min. Illumination | 1.07mm 360° Lens | Built-In Microphone | |

Specifications

Camera	Video	Model	FEI-360IP5
		Image Sensor	6MP 1/2.9" CMOS (3096 × 2196)
		Effective Pixels	2160x2160 (1:1)
		Electronic Shutter	1/25s ~ 1/1000000s
		Frame Rate	1-25/30FPS
		Day & Night	ICR
		Min. Illumination	Day: 0.04lux / Night: 0.01lux (@F2.0, AGC On) 0lux with IR on
	Audio	Audio compression	G.711A/G.711U
		Communication	Two-way Audio
	Image Processing	Image Settings	AWB, AGC Adjustable Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
		Image Enhancement	Digital WDR / BLC / HLC / ROI
		Noise Reduction	3D-DNR
		Image Orientation	Ceiling / Wall Installation
		Privacy Zone	Yes
		Motion Detection	Yes
Analytics		No	
Compression	Video Compression	H.265 / H.264	
	Resolution	5MP(2160x2160), 4MP(1920x1920), 2MP(1440x1440), 960x960, 480x480	
	View Modes	Fish-Eye (360° Bubble), 360° Stretched view (Lens Correction), 360° Split View, Fish-Eye (360° Bubble) + 3 Digital PTZ	
	Bit rate	64Kbps ~ 10Mbps@H.265 / 64Kbps ~ 10Mbps@H.264	
	Encode Mode	VBR/CBR	
Image Quality	Five levels under VBR; Free adjustment under CBR		

Housing	IR Distance	15m (6 High Power Wide Angle IR LED)
	Lens (Field of View)	1.07mm (360° for Ceiling Mount / 180° For Wall Mount)
	Iris	Fixed Iris
	Lens Mount	Φ14 mount
	Protection Rate	Water Proof: IP66 / Vandal Proof: IK10
	Bracket	Surface Mount (Ceiling / Wall)
Connectivity	Dimensions	Φ130mm×39mm
	Weight(gross)	432g
	Network	RJ45 (+PoE)
	Power	DC Socket
	Analog Video Output	CVBS (BNCx1)
	Audio Connectivity	Built-In Microphone / Mic Input + Audio Output
	SD Card	Event/Schedule based Main/Sub-Stream recording (Up to 128Gb)
	RS485	Yes
	Alarm	1Ch Input, 1Ch Output
	Network	Remote Monitoring
User Access		Supports simultaneous monitoring for up to 10 users with multi-stream real time transmission
Network Protocol		TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP
ONVIF		Yes
Others	Ethernet	100Mbps
	PoE	Yes
Power Supply	DC12V/~300mA / PoE/~3W	
Work Environment	-20 C ~ 50 C, 10%~90% Humidity	

